

DGT1P

DGT1P - PANEL DIGITAL WEIGHT TRANSMITTER / INDICATOR



Panel weight transmitter/indicator with aluminum case. Ideal as microcontroller in industrial weighing and dosing systems, it makes it easier and safer to integrate the weighing into any automation system. Up to 2 programmable digital inputs and 6 outputs.

Approvals:

**CE-M EN 45501, OIML R-76, OIML R-61 (MID),
OIML R-51 (MID)**


TECHNICAL FEATURES

- Power supply: 12-24 Vdc
- Converter: A/D 24 bit with 1 channel
- Max number of scales: 1
- Load cells connection: 4 or 6 wires (with sense)
- Conversion rate: 400 Hz
- Selectable sampling rate: up to 400 conv./sec
- Displaying: up to 800.000d
- Signal sensitivity: 0,01 $\mu\text{V/d}$ (0,03 $\mu\text{V/e}$)
- Resolution: 3.000.000 points
- Linearization: up to 8 points
- Connectable load cells: up to 16x350 Ω cells
- Serial ports: 1 RS485 port
- Analog output: 16 bit optoisolated (DGT1PAN Model) choosing between 0-5Vdc, 0-10Vdc, 4-20mA or 0-20mA.
- Digital outputs: n. 2 OUT (optional up to 6), configurable optoisolated photomofet
- Digital inputs: n. 2 IN, configurable optoisolated
- Case: aluminium. Dimensions: 100 x 53 x 136 mm(lxhxw). Panel cutout: 92 x 44 mm(lxh).
- Calibration:
 - Theoretical (mV/V)
 - With sample weights
- Keyboard functions: zeroing, tare, function mode, print, manual data sending, On/Stand-by
- Program functions:
 - Setpoint
 - High resolution
 - Peak
 - Alibi Memory
 - Unit of measure conversion
- Keyboard: mechanical with 5 digits, waterproof
- Display: 14,2mm red LED


MAIN CERTIFICATIONS

- CE-M EN 45501
- OIML R76
- OIML R61 - MID
- OIML R51

DETAIL 1

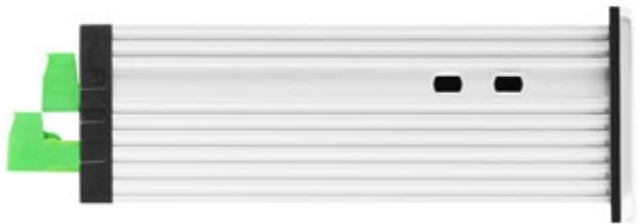

DETAIL 2

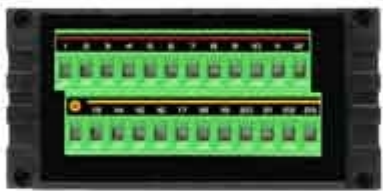



MASSAMATIC PTY LTD

13 BOOMPIES STREET - 7500 - PAROW-EAST - SOUTH AFRICA

Tel. 0027-219302510

Fax. 0027-219398488

E-mail sales@massamatic.com

Web www.massamatic.com